




# LED

## Center Basket Troffer

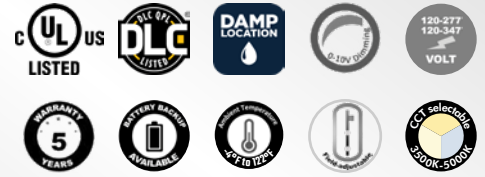

### PERFORMANCE FEATURES

- LEDs**  
Long-life, high-efficacy micro-power LEDs
- Flicker**  
Produces no greater than 30 percent flicker at 200 Hz or below when paired with control devices per CEC Title 24 JA10
- Lifespan**  
Lumen Maintenance, L70 > 54,000 hours  
Rated Life: 100,000 hours
- Optional Accessories**
  - Surface mount kit | Drywall mount kit
  - Suspension Mount kit
  - Occupancy sensor
  - EM battery
- Finish**  
Long lasting white finish with high durability
- Dimming Driver**  
Driver includes dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V
- Mounting**
  - Grid ceiling
  - Recessed drywall
  - Surface mounting
  - Suspended installation
- Housing**  
Cold-rolled steel  
And Frosted PMMA lens
- UL Listing**  
Suitable for damp locations

### SKU GUIDE

#### Model Section

TRO4-45W-CCT-DV2-F-WHSM-2


TRO4		45W	CCT	DV2		F	WHSM	
BODY TYPE PREFIX	MODEL NAME	WATTAGE	CCT (if selectable = CCT)	DRIVER	VOLTAGE	ELECTRICAL OPTIC/LENS	HOUSING FINISH	MOUNTING
TRO	2 - 2X2 FT 4 - 2X4 FT	35W - 25/30/35 45W - 34/38/45	CCT - 3500K/ 4000K/5000K (3-Way CCT Selectable)	D - 0-10V Dimming	V2 - 120-277V (Universal Voltage)	F-Frosted Lens	WH-White Finish	SM-Surface Mount




# SKU SPECIFICATION

SKU #	Nominal Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage	Operating Temp.	Certifications	Avail Options
RTR04-45W-CCT-DV2-F-WHSM-2	35/30/25	3500K/ 4000K/ 5000K	4375/ 3750/ 3125	125	>80	120-277V	-4(Degree) F/ -20(Degree)C to 122(Degree) F/ -50(Degree) C	UL listed DLC listed	Occupancy sensor, EM battery
TRO4-45W-CCT-DV2-F-WHSM-2	45/38/34	3500K/ 4000K/ 5000K	5625/ 4750/ 4250	125	>80	120-277V	-4(Degree) F/ -20(Degree)C to 122(Degree) F/ -50(Degree) C	UL listed DLC listed	Occupancy sensor, EM battery

# PRODUCT DIMENSIONS

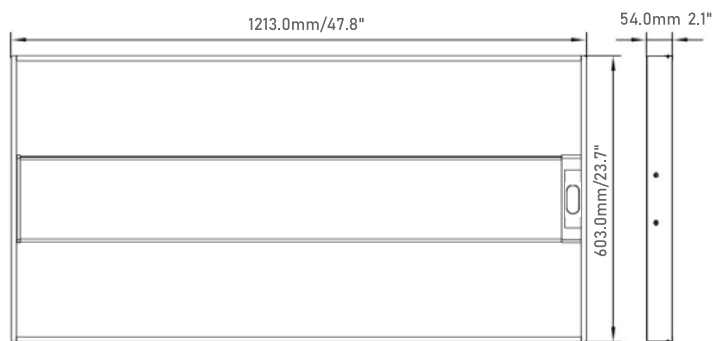

Product Weight : 5.19Kg/11.44lb

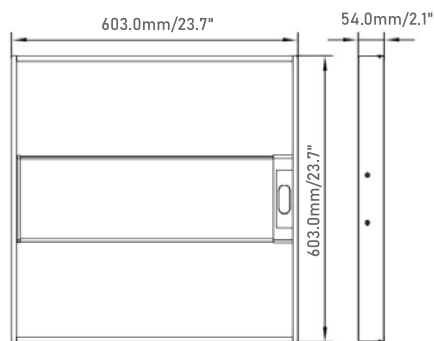


Product Weight : 3.10Kg/6.83lb

# PACKAGING DIMENSIONS

SKU #	Standard Pack	Dimension
TRO2-35W-CCT-DV2-NA-F-WHSM-2	2 Pack	L 22.7 in x W 22.7in x H 10.1in
TRO4-45W-CCT-DV2-NA-F-WHSM-2	2 Pack	L 49.7 in x W 24.7in x H 10.3in

# PHOTOMETRICS

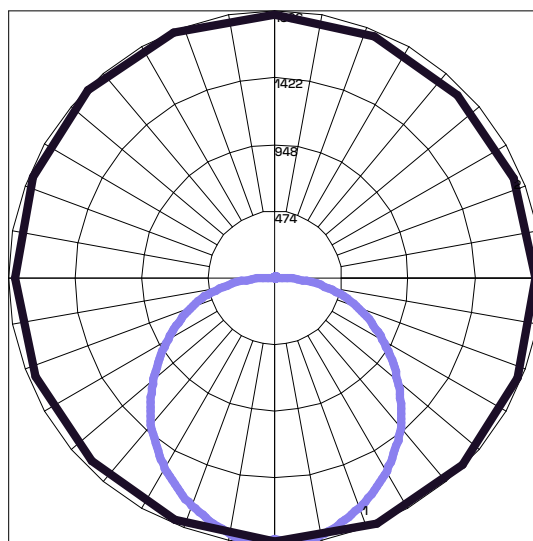

Maximum Candela = 1896.2 Located At Horizontal Angle = 292.5, Vertical Angle = 5  
 # 1 - Vertical Plane Through Horizontal Angles (292.5 - 112.5) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.)

