



1.4FT



1.9FT



2.6FT



LED Compact High Bay Light



PERFORMANCE FEATURES

LEDs

Long-life, high-efficacy, micro-power LEDs.
-20°C (-4°F) to 50°C (122°F)

Dimming Driver

Driver includes dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V.

IESNA LM-79 & IESNA LM-80 Testing

LED luminaires have been tested based on IESNA LM-79 and LM-80 by a third-party laboratory

Finish

Long lasting white finish with high durability

Housing and Lens

Sheet metal stamping
PMMA optical glare-control lens

UL Listing

Suitable for damp locations

Lifespan:

Lumen Maintenance, L70 > 54,000 hours
Rated Life: 100,000 hours

SKU GUIDE

Model Section

LHBL-270W-40K-DV2-NA-F-WHHM-4





LHBL		270W	CCT	DV2		OS	F	WHSM	
BODY TYPE PREFIX	MODEL NAME	WATTAGE	CCT(if selectable=cct)	DRIVER	VOLTAGE	CONTROLS	ELECTRICAL OPTIC/LENS	HOUSING FINISH	MOUNTING
LHB	S - 1.4 FT	135W	40K=4000K	D - 0-10V Dimming	V2 - 120-277V (Universal Voltage)	OS-Occupancy Sensor	F- Frosted Lens	WH- White Finish	SM - Surface Mount
	M - 1.9 FT	200W	50K=5000K						
	L - 2.6 FT	270W							



SKU SPECIFICATION

SKU #	Nominal Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage	Operating Temp.	Certifications	Avail Options
LHBS-135W-40K-DV2-NA-F-WHHM-4	135W	4000K	20250	150	>80	120-277V	-4(Degree) F/ -20(Degree)C to 122(Degree) F/ -50(Degree) C	UL listed DLC listed	Occupancy Sensor EM battery backup
LHBM-200W-40K-DV2-NA-F-WHHM-4	200W	4000K	30000	150	>80	120-277V	-4(Degree) F/ -20(Degree)C to 122(Degree) F/ -50(Degree) C	UL listed DLC listed	Occupancy Sensor EM battery backup
LHBL-270W-40K-DV2-NA-F-WHHM-4	270W	4000K	40500	150	>80	120-277V	-4(Degree) F/ -20(Degree)C to 122(Degree) F/ -50(Degree) C	UL listed DLC listed	Occupancy Sensor EM battery backup


PRODUCT DIMENSIONS

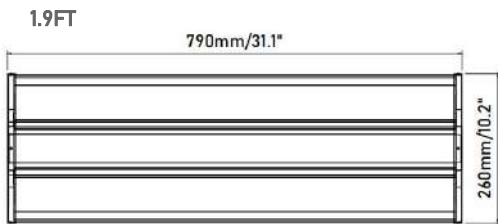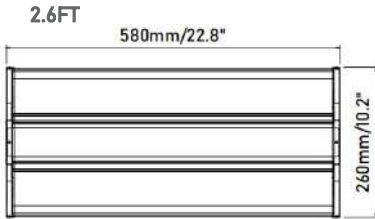

ACCESSORIES



PHOTOMETRICS

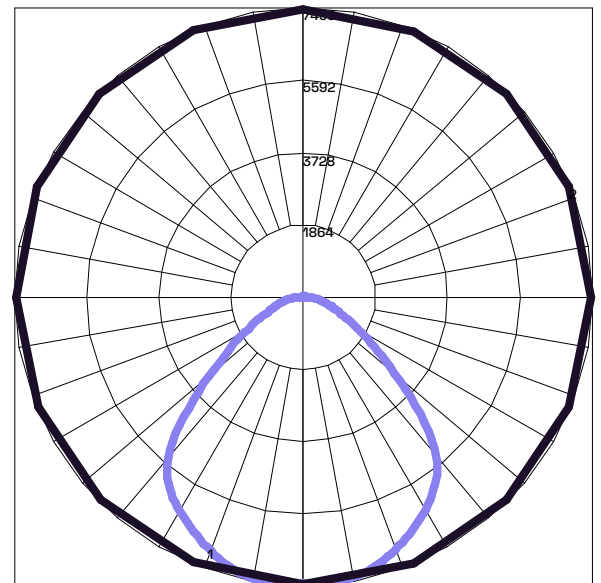

Maximum Candela = 7456.1 Located At Horizontal Angle = 157.5, Vertical Angle = 4
 # 1 - Vertical Plane Through Horizontal Angles (157.5 - 337.5) (Through Max. Cd.)
 # 2 - Horizontal Cone Through Vertical Angle (4) (Through Max. Cd.)

PACKAGING DIMENSIONS

SKU #	Standard Pack	Dimension
LHBS-135W-40K-DV2-NA-F-WHHM-4	4 Pack	L 17.7in x W 10.9in x H 8.5in
LHBM-200W-40K-DV2-NA-F-WHHM-4	4 Pack	L 23.8in x W 11.1in x H 8.6in
LHBL-270W-40K-DV2-NA-F-WHHM-4	4 Pack	L 32.2in x W 10.9in x H 8.5in

